

SMART SUPREMO

ROTARY TILLER

Salient Feature

- **Smart Supremo rotary tiller is a secondary tillage implement offering best in class pulverization and optimum seed germination.**
- **Robust hitch pyramid for better load distribution.**
- **Equipped with heavy duty multispeed gearbox (4 speed) for wider range of rotor speed.**
- **Ensures excellent cutting and mixing of crop residue.**
- **In built 2 Gear Pair which allows 4 different rotor RPM.**

World's only rotary tiller with robust dual tubular & angular support for eliminating mechanical vibrations to almost zero.

EXTRA
BLADES




SMART SUPREMO

ROTARY TILLER



WALK AROUND SMART SUPREMO

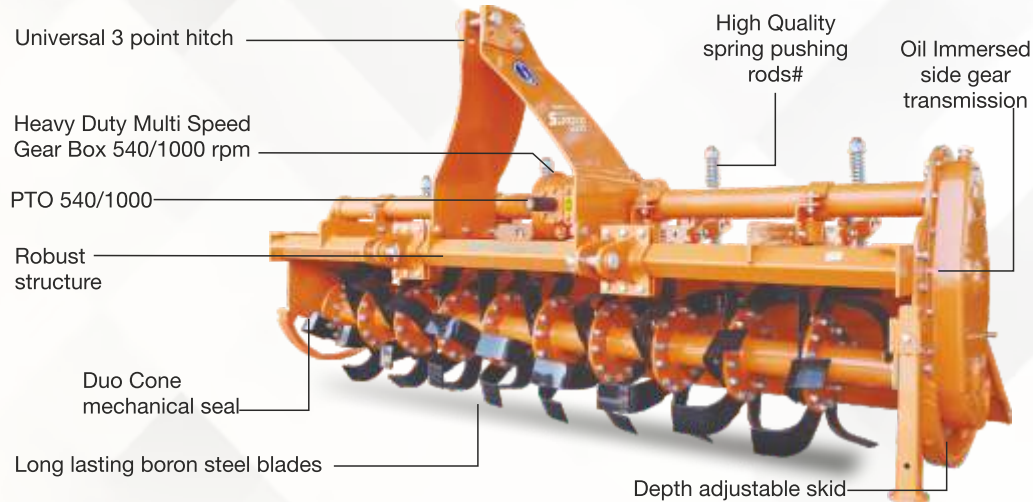

TECHNICAL SPECIFICATION

SIZE	5.5 FEET	6 FEET	7 FEET	8 FEET
Tillage width (in/cm)	66/166	69/174	79/199	86/219
Total Width (in/cm)	77/196	80/203	90/229	99/251
Total Length (in/cm)	35/90	35/90	35/90	35/90
Height (in/cm)	44.4/113	44.4/113	44.4/113	44.4/113
PTO Speed (RPM)	540/1000	540/1000	540/1000	540/1000
No. Of Blades	48	54	60	66
Types of Blades	L/C	L/C	L/C	L/C
Weight (KG) Approx	400	420	460	495
Suitable Tractor HP	35-40	40-45	50-55	55-60
3-Point Hitch Type	Cat-II	Cat-II	Cat-II	Cat-II
Transmission type	GEAR	GEAR	GEAR	GEAR
Max Working depth (in/cm)	6/15	6/15	6/15	
Rotor tube diameter (in/cm)	3.5/9	3.5/9	3.5/9	3.5/9
Rotor Swing dia (in/cm)	20/51	20/51	20/51	20/51
Driveline safety Device	SHEAR BOLT	SHEAR BOLT	SHEAR BOLT	SHEAR BOLT



DUO CONE MECHANICAL OIL SEALS



AVAILABLE WITH L&J TYPE BORON STEEL BLADES



HELICAL ARRANGEMENTS OF BLADES



FOUR SPEED GEAR BOX



OIL IMMERSED SIDE BEARING

Boron Steel Blades



- 20% longer life.
- Hard to break & bend.
- Saves money & time.

SMART PRODUCT WITH SMART PERFORMANCE FOR A SMART FARMER

SONALIKA INDUSTRIES

(A UNIT OF INTERNATIONAL CARS & MOTORS LTD.)

Works & Admin Office: Vill. Chak Gujran, Jalandhar Road, Hoshiarpur- 146 022 (Pb.), India

Phone: +91 99149-34522, +91 1882-501320 | Email: info@sonalikaindustries.com | Website: www.sonalika.com/agrosolutions

Auth. Dealer